



Non-Insulated Wire End Ferrules


Art. No. 0964 557

Contents: 12 sizes from 0.5 mm² x 6 mm – 10.0 mm² x 18 mm = 1,200 parts
+ Pliers Art. No. 0557 10

Insulated Wire End Ferrules

Art. No. 0964 557 0

Contents: 9 sizes from 0.5 mm² x 14.2 mm – 16 mm² x 22.7 mm = 525 parts
+ Pliers Art. No. 0557 10

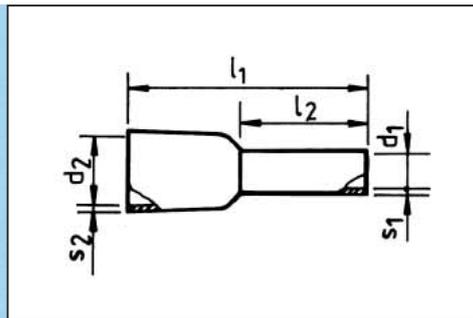

Cross-section in mm ²	Color	l ₁	l ₂	d ₁	s ₁	d ₂	s ₂	Art. No.	P. Qty.
1.5	Black	17.50	8.00	1.70	0.15	7.50	0.30	0557 350 151	100
1.5	Black	19.50	10.00	1.70	0.15	7.50	0.30	0557 350 152	
2.5	Blue	17.50	8.00	2.20	0.15	8.00	0.30	0557 350 251	
2.5	Blue	21.50	12.00	2.20	0.15	8.00	0.30	0557 350 252	
4.0	Gray	19.50	10.00	2.80	0.20	9.50	0.50	0557 350 401	
6.0	Yellow	23.00	12.00	3.50	0.20	10.00	0.50	0557 350 601	
10.0	Red	24.00	12.00	4.50	0.20	11.50	0.50	0557 350 101	
16.0	Blue	25.50	12.00	5.80	0.20	13.50	0.50	0557 350 161	


Wire End Ferrules

with plastic sleeves for short circuit- and ground fault-proof lines

- For cables from 1.5 to 16 mm².
- Insertion bellmouth made of polypropylene, heat-resistant up to +110°C.
- Material: E-Cu.
- Surface: electroplated tin.
- Minimum layer thickness: 3 µm.

Advantages

Suitable for all common short circuit- and ground fault-proof lines up to 3 kV (including rubber lines with fine-wire cables/NSGAFÖU 1.8/3 kV).

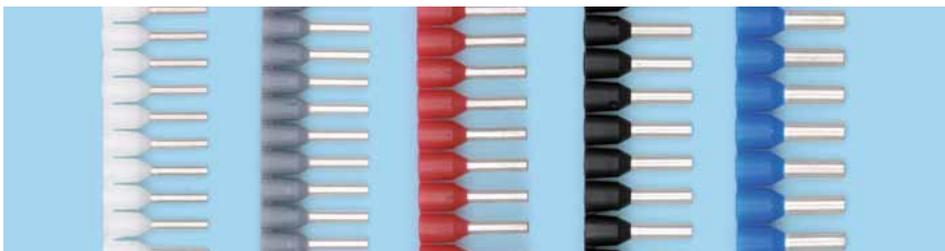

Wire End Ferrule Strips

Cross-section in mm ²	Color	Total length in mm	Art. No.	P. Qty.
0.5	White	14.0	0557 175 050	500 (10 strips)
0.75	Gray		0557 175 075	
1.0	Red		0557 175 100	
1.5	Black		0557 175 150	
2.5	Blue		0557 175 250	