


PNEUMATIC DRILL

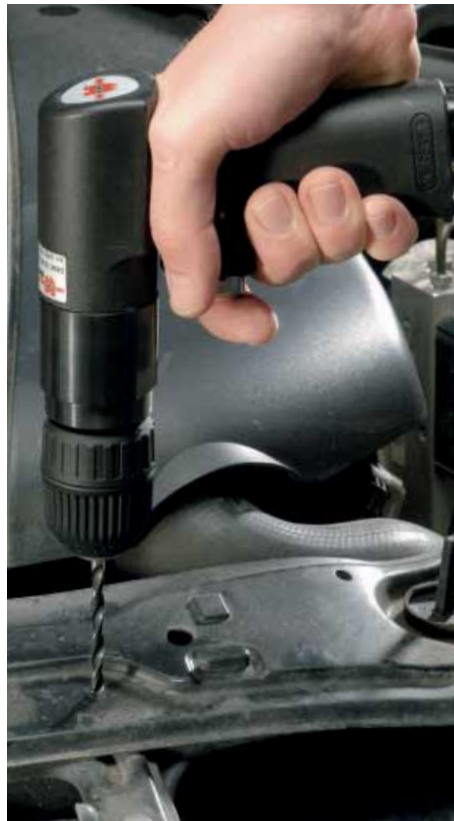

Especially light and handy drills with quick-action drill chuck. Right/left switchover on the RL models with 10 and 13-mm drill chuck.

DBM 10 plus
1. Art. No. 0703 795 0

DBM 10-RL plus
2. Art. No. 0703 796 0

DBM 13-RL plus
3. Art. No. 0703 797 0

Plastic handle.

For warm hands.

Light, compact design. Reduced vibrations.

Low-fatigue, pleasant working conditions.

Integrated muffler.

Low noise level.

Three-year warranty

on manufacturing or material defects.

Supplied without plug-in nipple.



Available in the fleet management system ORSY®fleet.

Accessories		
Designation	Art. No.	P.Qty.
Plug-in nipple with R 1/4" male thread, made of nickel-plated steel	0699 100 614	3
Small mist oiler	0699 070 314	1
Special oil for pneumatic tools (1 l)	0893 050 5	1

When used regularly, the machine should be lightly oiled via the compressed-air supply every day. The use of a mist oiler is recommended.

Technical Data

Model	Drill chuck holder	Speed in rpm	Weight in kg	Oper. press. in bar	Avg. air cons. in l/min	Output in W	Dimensions (l x w x h) in mm	Connection thread	Min. hose dia. in mm	Art. No.	P. Qty.
DBM10 plus	3/8"-24 UNF	2,000	1.0	6.3	85	335	180x170x50	R 1/4"	8	0703 795 0	1
DBM10 plus	3/8"-24 UNF	1,700	1.0	6.3	96	335	180x170x50	R 1/4"	8	0703 796 0	1
DBM13-RL plus	3/8"-24 UNF	700	1.5	6.3	96	335	205x170x50	R 1/4"	8	0703 797 0	1